

APOLLO CHANDELIER

PRODUCT FACT SHEET



APOLLO CHANDELIER


DESIGN BY STUDIO 0405, 2023

Designed by STUDIO 0405, the Apollo Chandelier is a contemporary take on a classic lamp archetype, sharing basic structural characteristics of the traditional chandelier updated in a sculptural and functional design. Comprising multiple mouth-blown opal glass shades atop curved tubular arms, creating a contrasting expression between the handcrafted, organically shaped shades and the industrial anodised aluminium tubing. The Apollo Chandelier makes an ideal room centrepiece suitable for using in a variety of private and public places. Available in two different sizes, with six or 12 arms.


HIGHLIGHTS

- Part of a progressive and technologically advanced lighting collection.
- A new member of the Apollo family, Apollo Chandelier is a contemporary take on a classic lamp archetype.
- Sculptural and functional interpretation of the traditional chandelier.
- Mouth-blown opal glass shades on curved tubular arms.
- Available in two different sizes, with six or 12 arms.
- Retrofit G9 LED bulb light source.
- It makes an ideal room centrepiece suitable for using in a variety of private and public places.
- CE approved.
- Qualified for contract use.
- Suitable for indoor environments.

DIMENSIONS



APOLLO CHANDELIER 745
DIAMETER 74,5 CM
HEIGHT 36 CM

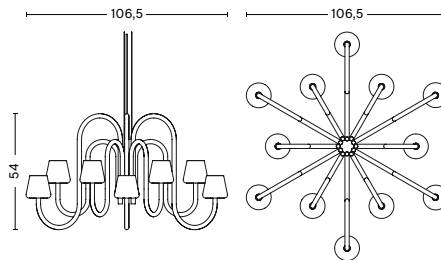

APOLLO CHANDELIER 1065
DIAMETER 106,5 CM
HEIGHT 54 CM

MATERIALS

SHADE	SHADE CONNECTOR	ARM	CORD	CANOPY
Mouth blown glass shades.	Anodised extruded aluminium.	Anodised bent aluminium tube.	Flat translucent pvc cable.	Anodised, stamped aluminium.

COLOUR & FINISH

Please note that the colour codes are indicative.



WHITE OPAL
GLASS

TECHNICAL SPECIFICATIONS

RECOMMENDED LIGHT SOURCE*	DIMMABLE	POWER SUPPLY	IP	CORD LENGTH	SWITCH
LED G9 (6 or 12 pcs.), 3-5W (max. 5W), 300-600lm, 2700-3000K warm white	No	220-240V AC at 50/60Hz	20	600 cm	No


*Bulbs not included.

TEST SPECIFICATIONS


FLUX (LUMENS)	CCT (KELVIN) & CRI (1-100)
1571lm (Apollo Chandelier 745) 2765lm (Apollo Chandelier 1065)	The levels will vary depending on the type of bulbs used in the lamp.

PHOTOMETRICS

APOLLO CHANDELIER 745

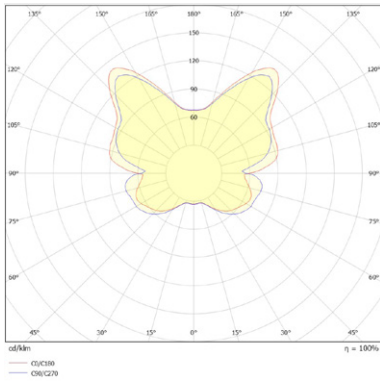

APOLLO CHANDELIER 1065

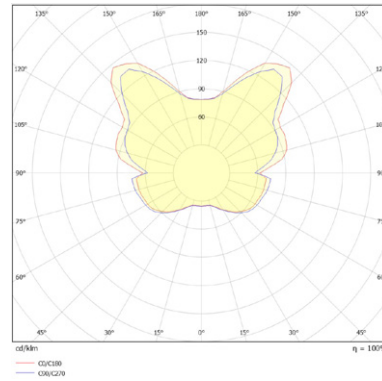

CERTIFICATES

CE APPROVED

This product has been assessed and complies with the essential requirements of the relevant European directives.



Tested according to the following European EN IEC standards which relate specifically to electrical lighting products including:

- EN 55015:2013 (radio disturbance)
- EN 61547:2009 (EMC immunity)
- EN 61000-3-2:2014 (EMC compatibility)
- EN 61000-3-3:2013 (EMC compatibility)
- EN 60598-2-4:1997 (portable luminaires)
- EN 60598-1:2015 (general requirements)
- EN 62493:2010 (human exposure to EMC)

COUNTRY OF ORIGIN

China

DOWNLOADS

Packshots and lifestyle photos, 2D / 3D files, care and maintenance, instructions, test certificates, product fact sheets, and product presentations are available in our Digital Library at hay.com.

[LINK TO DIGITAL LIBRARY](#)