
ASSEMBLY INSTRUCTIONS

Pantop Portable Design by VERNER PANTON

Please read thoroughly before use


VERPAN

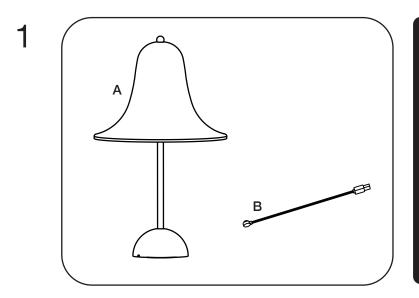

CONTENT:


A PANTON TABLE LAMP. THE LAMP IS DELIVERED FULLY ASSEMBLED.


B USB CHARGING CABLE

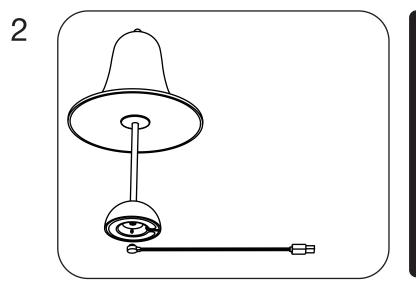


BEFORE USE, THE BATTERY IN THE LAMP MUST BE FULLY CHARGED.

PLACE THE MAGNETIC CHARGING CABLE AT THE BOTTOM OF THE LAMP. CONNECT THE USB CABLE TO A POWER SUPPLY.

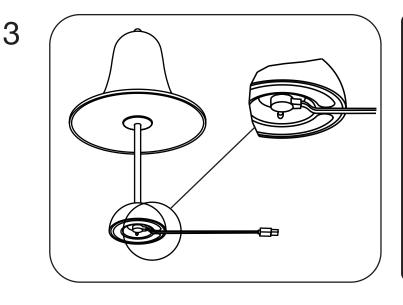



4

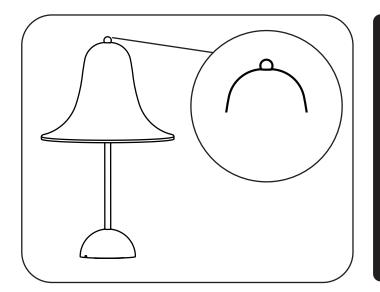

THE LIGHT INTENSITY OF THE LAMP CAN BE ADJUSTED BY TOUCHING THE DIMMER KNOB ON THE TOP OF THE LAMP.

THE LAMP HAS 3 LIGHT INTENSITY LEVELS: 100%, 70% AND 30%.

IMPORTANT:

- THIS LAMP IS FOR INDOORS USE ONLY. IT CAN BE TAKEN OUTDOORS, BUT MUST BE KEPT AND STORED INDOORS.
- BATTERIES MUST BE DISPOSED OF ACCORDING TO LOCAL ENVIRONMENTAL LAWS FOR WASTE DISPOSAL.
- WIPE THE SURFACE WITH A SOFT, DAMP CLOTH, AND WIPE IMMEDIATELY WITH A DRY CLOTH. DO NOT USE ANY ABRASIVE CLEANING TOOLS.
- THE BATTERY MUST BE REMOVED FROM THE LAMP BEFORE IT IS SCRAPPED; THE APPLIANCE MUST BE DISCONNECTED FROM THE SUPPLY MAINS WHEN REMOVING THE BATTERY; THE BATTERY MUST BE DISPOSED SAFELY.
- IF THE EXTERNAL FLEXIBLE CABLE OR CORD OF THIS LUMINAIRE IS DAMAGED, IT SHALL BE REPLACED BY A SPECIAL CORD OR CORD EXCLUSIVELY AVAILABLE FROM THE MANUFACTURER OR HIS SERVICE AGENT.
- THE PRODUCT SHALL BE SUPPLIED BY AN EXTERNAL SELV CONTROLGEAR WITH 5V MIN. 1A OUTPUT.
- INPUT MICRO USB CABLE 5.0 = 1A
- 1.5W LED BOARD (REPLACEABLE)
- CHARGING TIME: 5 HOURS
- OPERATION TIME IN HIGHEST SETTING: 7 HOURS

DESIGNED IN THE PAST MADE FOR TOMORROW

VERPAN

Egeskovvej 29 8700 Horsens Denmark

www.verpan.com

info@verpan.com