NEW

ZERO TRACK

DESIGNED BY FLOS ARCHITECTURAL

SURFACE

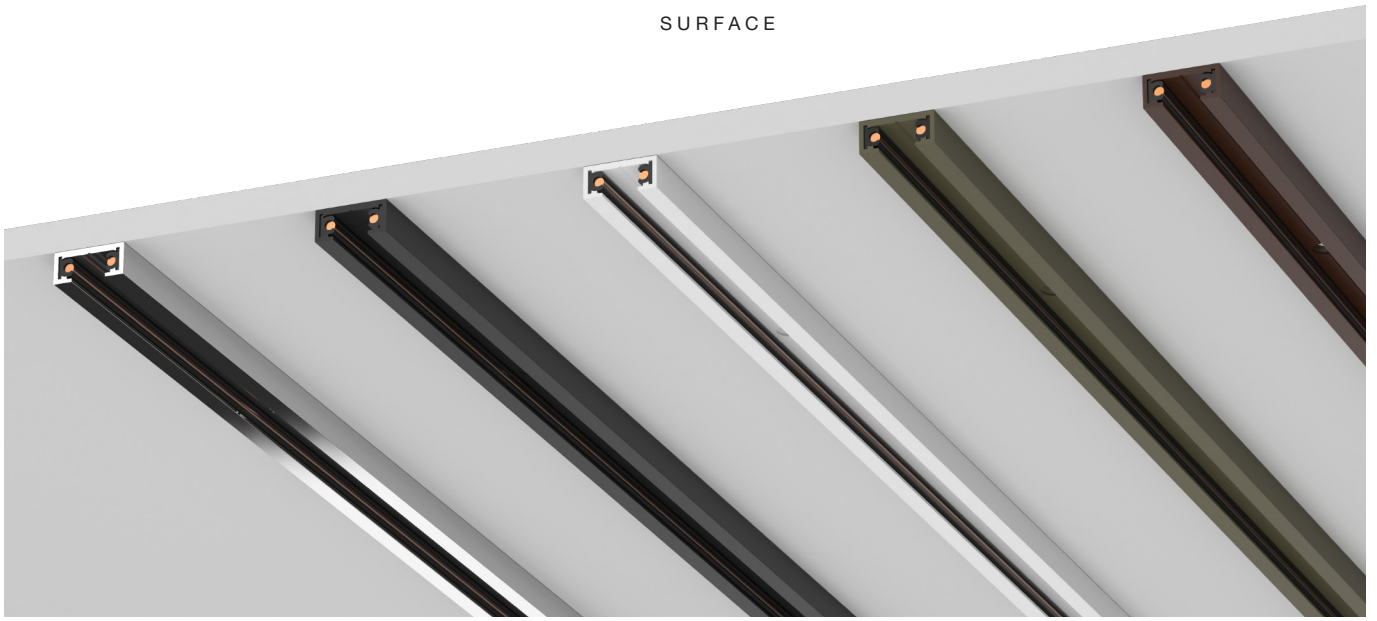

40 White
40 Blanco

06 Chrome
06 Cromo

14 Black
14 Negro

CZ Bronce
CZ Bronze

18 Deep brown
18 Deep brown

LIGHT MODULES

FIND ME 0

LIGHT SOURCE
POWER LED
3,5W
300 lm
2700K/CRI 90
325 lm
3000K/CRI 90

FIND ME 1

LIGHT SOURCE
POWER LED
5,5W
450 lm
2700K/CRI 90
485 lm
3000K/CRI 90

FIND ME 1 SUSPENSION

LIGHT SOURCE
POWER LED
5,5W
450 lm
2700K/CRI 90
485 lm
3000K/CRI 90

ATOM 90

LIGHT SOURCE
POWER LED
5,5W
450 lm
2700K/CRI 90
485 lm
3000K/CRI 90

ATOM 120

LIGHT SOURCE
POWER LED
8W
635 lm
2700K/CRI 90
680 lm
3000K/CRI 90

ATOM 200

LIGHT SOURCE
POWER LED
10,5W
1050 lm
2700K/CRI 90
1150 lm
3000K/CRI 90

NEW

Description
This new system of profiles for surface installation is characterized by its reduced dimensions, providing a minimalist aesthetic which is highly appreciated in various architectural spaces. For non-accessible ceilings, the system has integrated dimmable power supplies, controlled by 1-10V broadcast control systems.
Available remote dimmable drivers controlled by DALI & CASAMBI broadcast.
The system of extruded aluminum tracks up to 3 meters in white, black, deep brown and bronze.
They are equipped with electric tracks supporting 24Vdc power supplies.

Optic system
- Find Me 0: Spot, Medium.
- Find Me 1: Spot, Medium.
- Find Me 1 Suspension: Spot, Medium.
- Atom 90: Spot, Medium.
- Atom 120: Spot, Medium.
- Atom 200: General lighting.

Power Supply
The system can be powered by a remote power supply (not included) or by power supply equipments to be inserted in the track, which include a dimmable power supply.
The power connector has a space for inserting the cables both from the top and the side. The corners are powered only by the rear part.
The maximum length with the same driver is 10 meters.

Additional Information
Electrical system powered at 24Vdc and limited to a maximum current of 8A and a maximum power of 192W.
IP20 protection grade.
Suitable for installation on normally inflammable surfaces.

Standard Compliance and Quality Marks
EN60598-1 European Technical Standards and any subsequent additions.

Descripción
Este nuevo sistema de perfiles para su instalación en superficie se caracteriza por sus dimensiones reducidas lo que le confiere una estética minimalista muy apreciada en diversos espacios arquitectónicos. Para soluciones en techos no accesibles, el sistema dispone de fuentes de alimentación atenuables integradas, mediante sistemas de control broadcast 1-10V.
Disponibles fuentes de alimentación remotas regulables mediante sistemas DALI y CASAMBI broadcast.
El sistema de carriles de aluminio de hasta 3m extruido en blanco, negro, deep brown y bronce.
Están dotados de pistas eléctricas para ser alimentadas a 24Vdc.

Sistema Óptico
- Find Me 0: Spot, Medium.
- Find Me 1: Spot, Medium.
- Find Me 1 Suspension: Spot, Medium.
- Atom 90: Spot, Medium.
- Atom 120: Spot, Medium.
- Atom 200: General lighting.

Unidades de Alimentación
El sistema puede alimentarse mediante fuente de alimentación remota no incluida o con los equipos de alimentación para insertar en el carril que sí incluyen una fuente de alimentación regulable.
El conector de alimentación dispone de reserva para la entrada de los cables tanto por la parte superior como por el lateral. Las esquinas son alimentables solo por la parte trasera.
La longitud máxima con un mismo driver es de 10 m.

Información Adicional
Sistema eléctrico alimentado a 24Vdc y limitado a una corriente máxima de 8 A y 192W.
Índice de protección IP20.
Instalable sobre superficies normalmente inflamables.

Cumplimiento de Normativa y Marcas de Calidad
Luminaria conforme con la Normativa Técnica Europea EN60598-1 y partes segundas.

NEW

ZERO TRACK SURFACE — PROFILES

Profiles

Electro-mechanical indoor profile for surface installation (ceiling or wall). To be fixed with specific screw plugs that come with the profile. 1-meter to 3-meters lengths.
It is necessary to order the power connector, intermediate connectors and covers separately.
90º, powered, mechanical corners in the same plane (symmetrical element for left and right corner) and 90º corner in a different plane (ceiling-wall and interior wall-wall) are available.
For vertical installations, installing the stopper is mandatory. It must be ordered separately.

Perfiles

Perfil electromecánico de interior para su instalación en superficie(techo o pared) con fijación mediante tornillos tacos específicos servidos con el perfil. Con longitudes de 1 a 3m.
Necesario pedir por separado conector de alimentación, conectores intermedios y tapas.
Disponibles esquinas mecánicas alimentables de 90º en el mismo plano (elemento simétrico para esquina izquierda y derecha) y esquina de 90º en distinto plano (techo-pared y pared-pared interior).
Para instalaciones verticales es necesario instalar el tope de fijación (stopper) que se tiene que pedir por separado.

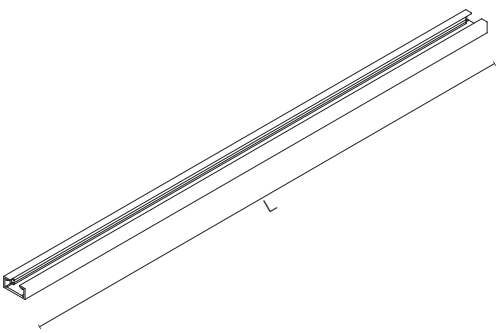

L: 1 m / 2 m / 3 m

L: 1000 mm
06.2500.40
06.2500.06
06.2500.14
06.2500.CZ
06.2500.18
L: 2000 mm
06.2501.40
06.2501.06
06.2501.14
06.2501.CZ
06.2501.18
L: 3000 mm
06.2502.40
06.2502.06
06.2502.14
06.2502.CZ
06.2502.18

Feed unit for remote power supply unit. Power cable inserting is possible both from the top and the side.	Conector de alimentación para equipo remoto. Posible entrada del cable de alimentación tanto superior como lateral.			06.2505.40 06.2505.14
Intermediate connector.	Conector intermedio.			06.2506.40 06.2506.14
90º flat corner. Can be powered. It has a rear space for the supply connection.	Esquina plana 90º. Alimentable, con reserva para acometida por la parte trasera.			06.2507.40 06.2507.14
Ceiling/wall - wall/wall inner corner. Can be powered. It has two spaces for the supply connection located on each side at the rear.	Esquina interior techo/pared - pared/pared. Alimentable, con dos reservas para acometida por la parte trasera en cada lado.			06.2508.40 06.2508.14
End cap.	Terminal.			06.2509.40 06.2509.14
Stopper. For fixing luminaires in vertical track installations.	Stopper. Para fijación de luminarias en instalaciones de carril vertical.			08.0630.40 08.0630.14

NEW

Find Me 0 Designed By Jorge Herrera

Light Source: Power LED 3,5W - 300 lm - 2700K/CRI 90 / 3,5W - 325 lm - 3000K/CRI 90





LED accent lighting module to be installed in the Zero Track system. Electronic DC/DC converter incorporated. Module controlled by 1-10V, DALI or CASAMBI. Dimmer not included. Broadcast control system.

Accessories included (honeycomb and screening crosspiece).

Módulo de iluminación LED de acento para ser instalado en el sistema Zero Track. Convertidor electrónico DC/DC incorporado. Módulo regulado mediante driver 1-10V, DALI o CASAMBI. Dimmer no incluido. Sistema de control broadcast.

Accesorios incluidos (honeycomb y cruceta de apantallamiento).

2700K
- 09.3801.40
- 09.3801.06
- 09.3801.14
- 09.3801.CZ
- 09.3801.18

15° SPOT



Luminous flux luminaire 169 lm

Beam Angle: 15°

h(m)	E(lx)	D(m)
1	1303	0.26
2	326	0.52
3	145	0.77
4	81	1.03
5	52	1.29

3000K
- 09.3800.40
- 09.3800.06
- 09.3800.14
- 09.3800.CZ
- 09.3800.18

15° SPOT



Luminous flux luminaire 183 lm

Beam Angle: 15°

h(m)	E(lx)	D(m)
1	1412	0.26
2	353	0.52
3	157	0.77
4	88	1.03
5	56	1.29

2700K
- 09.3803.40
- 09.3803.06
- 09.3803.14
- 09.3803.CZ
- 09.3803.18

20° MEDIUM



Luminous flux luminaire 163 lm

Beam Angle: 20°

h(m)	E(lx)	D(m)
1	1059	0.36
2	265	0.72
3	118	1.08
4	66	1.44
5	42	1.80

3000K
- 09.3802.40
- 09.3802.06
- 09.3802.14
- 09.3802.CZ
- 09.3802.18

20° MEDIUM



Luminous flux luminaire 177 lm

Beam Angle: 20°

h(m)	E(lx)	D(m)
1	1151	0.36
2	288	0.72
3	128	1.08
4	72	1.44
5	46	1.80

Find Me 1 Designed By Jorge Herrera

Light Source: Power LED 5,5W - 450 lm - 2700K/CRI 90 / 5,5W - 485 lm - 3000K/CRI 90





LED accent lighting module to be installed in the Zero Track system. Electronic DC/DC converter incorporated. Module controlled by 1-10V, DALI or CASAMBI. Dimmer not included. Broadcast control system.

Accessories included (honeycomb and screening crosspiece).

Módulo de iluminación LED de acento para ser instalado en el sistema Zero Track. Convertidor electrónico DC/DC incorporado. Módulo regulado mediante driver 1-10V, DALI o CASAMBI. Dimmer no incluido. Sistema de control broadcast.

Accesorios incluidos (honeycomb y cruceta de apantallamiento).

2700K
- 09.3812.40
- 09.3812.06
- 09.3812.14
- 09.3812.CZ
- 09.3812.18

14° SPOT



Luminous flux luminaire 309 lm

Beam Angle: 14°

h(m)	E(lx)	D(m)
1	4168	0.24
2	1042	0.48
3	463	0.72
4	261	0.95
5	167	1.19

3000K
- 09.3810.40
- 09.3810.06
- 09.3810.14
- 09.3810.CZ
- 09.3810.18

14° SPOT



Luminous flux luminaire 314 lm

Beam Angle: 14°

h(m)	E(lx)	D(m)
1	4193	0.24
2	1048	0.49
3	466	0.73
4	262	0.97
5	168	1.21

2700K
- 09.3813.40
- 09.3813.06
- 09.3813.14
- 09.3813.CZ
- 09.3813.18

20° MEDIUM



Luminous flux luminaire 186 lm

Beam Angle: 20°

h(m)	E(lx)	D(m)
1	1238	0.35
2	310	0.70
3	138	1.06
4	77	1.41
5	50	1.76

3000K
- 09.3811.40
- 09.3811.06
- 09.3811.14
- 09.3811.CZ
- 09.3811.18

20° MEDIUM



Luminous flux luminaire 193 lm

Beam Angle: 20°

h(m)	E(lx)	D(m)
1	1285	0.35
2	321	0.70
3	143	1.06
4	80	1.41
5	51	1.76

Find Me 1 Suspension Designed By Jorge Herrera

Light Source: Power LED 5,5W - 450 lm - 2700K/CRI 90 / 5,5W - 485 lm - 3000K/CRI 90

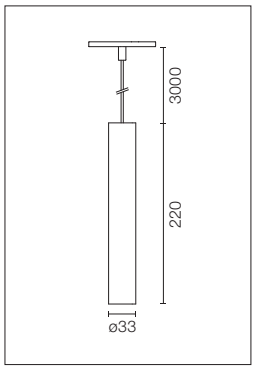



LED accent lighting module to be installed in the Zero Track system. Electronic DC/DC converter incorporated. Module controlled by 1-10V, DALI or CASAMBI. Dimmer not included. Broadcast control system.
Not suitable for vertical installations.

Accessories included (honeycomb and screening crosspiece).

Módulo de iluminación LED de acento para ser instalado en el sistema Zero Track. Convertidor electrónico DC/DC incorporado. Módulo regulado mediante driver 1-10V, DALI o CASAMBI. Dimmer no incluido. Sistema de control broadcast.
No se puede instalar en carriles verticales.

Accesorios incluidos (honeycomb y cruceta de apantallamiento).

2700K
09.3822.40
09.3822.06
09.3822.14
09.3822.CZ
09.3822.18

14° SPOT



Luminous flux luminaire 309 lm

Beam Angle: 14°

h(m)	E(lx)	D(m)
1	4168	0.24
2	1042	0.48
3	463	0.72
4	261	0.95
5	167	1.19

3000K
09.3820.40
09.3820.06
09.3820.14
09.3820.CZ
09.3820.18

14° SPOT



Luminous flux luminaire 314 lm

Beam Angle: 14°

h(m)	E(lx)	D(m)
1	4193	0.24
2	1048	0.49
3	466	0.73
4	262	0.97
5	168	1.21

2700K
09.3823.40
09.3823.06
09.3823.14
09.3823.CZ
09.3823.18

20° MEDIUM



Luminous flux luminaire 186 lm

Beam Angle: 20°

h(m)	E(lx)	D(m)
1	1238	0.35
2	310	0.70
3	138	1.06
4	77	1.41
5	50	1.76

3000K
09.3821.40
09.3821.06
09.3821.14
09.3821.CZ
09.3821.18

20° MEDIUM



Luminous flux luminaire 193 lm

Beam Angle: 20°

h(m)	E(lx)	D(m)
1	1285	0.35
2	321	0.70
3	143	1.06
4	80	1.41
5	51	1.76

Atom 90 Designed By Piero Lissoni

Light Source: Power LED 5,5W - 450 lm - 2700K/CRI 90 / 5,5W - 485 lm - 3000K/CRI 90





LED accent lighting module to be installed in the Zero Track system. Electronic DC/DC converter incorporated. Module controlled by 1-10V, DALI or CASAMBI. Dimmer not included. Broadcast control system.

Accessories included (honeycomb and screening crosspiece).

Módulo de iluminación LED de acento para ser instalado en el sistema Zero Track. Convertidor electrónico DC/DC incorporado. Módulo regulado mediante driver 1-10V, DALI o CASAMBI. Dimmer no incluido. Sistema de control broadcast.

Accesorios incluidos (honeycomb y cruceta de apantallamiento).

2700K
09.3831.40
09.3831.06
09.3831.14
09.3831.CZ
09.3831.18

14° SPOT



Luminous flux luminaire 224 lm

Beam Angle: 14°

h(m)	E(lx)	D(m)
1	2558	0.25
2	640	0.51
3	284	0.76
4	160	1.02
5	102	1.27

3000K
09.3830.40
09.3830.06
09.3830.14
09.3830.CZ
09.3830.18

14° SPOT



Luminous flux luminaire 247 lm

Beam Angle: 14°

h(m)	E(lx)	D(m)
1	2832	0.25
2	708	0.51
3	315	0.76
4	177	1.02
5	113	1.27

2700K
09.3833.40
09.3833.06
09.3833.14
09.3833.CZ
09.3833.18

21° MEDIUM



Luminous flux luminaire 217 lm

Beam Angle: 21°

h(m)	E(lx)	D(m)
1	1362	0.37
2	341	0.73
3	151	1.10
4	85	1.47
5	54	1.84

3000K
09.3832.40
09.3832.06
09.3832.14
09.3832.CZ
09.3832.18

21° MEDIUM



Luminous flux luminaire 240 lm

Beam Angle: 21°

h(m)	E(lx)	D(m)
1	1508	0.37
2	377	0.73
3	168	1.10
4	94	1.47
5	60	1.84

NEW

Atom 120 Designed By Piero Lissoni

Light Source: Power LED 8W - 635 lm - 2700K/CRI 90 / 8W - 680 lm - 3000K/CRI 90





LED accent lighting module to be installed in the Zero Track system. Electronic DC/DC converter incorporated. Module controlled by 1-10V, DALI or CASAMBI. Dimmer not included. Broadcast control system.

Accessories included (honeycomb and screening crosspiece).

Módulo de iluminación LED de acento para ser instalado en el sistema Zero Track. Convertidor electrónico DC/DC incorporado. Módulo regulado mediante driver 1-10V, DALI o CASAMBI. Dimmer no incluido. Sistema de control broadcast.

Accesorios incluidos (honeycomb y cruceta de apantallamiento).

2700K
- 09.3841.40
- 09.3841.06
- 09.3841.14
- 09.3841.CZ
- 09.3841.18



Luminous flux luminaire 433 lm

Beam Angle: 14°

h(m)	E(lx)	D(m)
1	5843	0.24
2	1461	0.48
3	649	0.72
4	365	0.95
5	234	1.19

3000K
- 09.3840.40
- 09.3840.06
- 09.3840.14
- 09.3840.CZ
- 09.3840.18



Luminous flux luminaire 440 lm

Beam Angle: 14°

h(m)	E(lx)	D(m)
1	5878	0.24
2	1469	0.49
3	653	0.73
4	367	0.97
5	235	1.21

2700K
- 09.3843.40
- 09.3843.06
- 09.3843.14
- 09.3843.CZ
- 09.3843.18



Luminous flux luminaire 364 lm

Beam Angle: 20°

h(m)	E(lx)	D(m)
1	2557	0.35
2	639	0.70
3	284	1.06
4	160	1.41
5	102	1.76

3000K
- 09.3842.40
- 09.3842.06
- 09.3842.14
- 09.3842.CZ
- 09.3842.18



Luminous flux luminaire 373 lm

Beam Angle: 20°

h(m)	E(lx)	D(m)
1	2624	0.35
2	656	0.70
3	292	1.06
4	164	1.41
5	105	1.76

Atom 200 Designed By Piero Lissoni

Light Source: Power LED 10,5W - 1050 lm - 2700K/CRI 90 / 10,5W - 1150 lm - 3000K/CRI 90





LED general lighting module to be installed in the Zero Track system. Electronic DC/DC converter incorporated. Module controlled by 1-10V, DALI or CASAMBI. Dimmer not included. Broadcast control system.
Not suitable for vertical installations.

Módulo de iluminación LED general para ser instalado en el sistema Zero Track. Convertidor electrónico DC/DC incorporado. Módulo regulado mediante driver 1-10V, DALI o CASAMBI. Dimmer no incluido. Sistema de control broadcast.
No se puede instalar en carriles verticales.

2700K
- 09.3851.40
- 09.3851.06
- 09.3851.14
- 09.3851.CZ
- 09.3851.18



Luminous flux luminaire 395 lm

Beam Angle: 110°

h(m)	E(lx)	D(m)
1	145	2.86
2	36	5.73
3	16	8.59
4	9	11.45
5	6	14.32

3000K
- 09.3850.40
- 09.3850.06
- 09.3850.14
- 09.3850.CZ
- 09.3850.18



Luminous flux luminaire 424 lm

Beam Angle: 110°

h(m)	E(lx)	D(m)
1	156	2.86
2	39	5.73
3	17	8.59
4	10	11.45
5	6	14.32

NEW

ZERO TRACK – DRIVERS

Drivers / Equipos

1-10V Broadcast / Non Dimmable

Surface Installation

Power supply surface end. Dimmable through 1/10V protocol or Non Dimmable. Not suitable for wall installations.

Fuente de alimentación inicial para instalación en superficie. Dimable mediante protocolo 1/10V o No Dimable. No se puede instalar en carriles en pared.



57W – 220/240V
06.2510.40
06.2510.06
06.2510.14
06.2510.CZ
06.2510.18

Surface Installation

Power supply surface middle. Dimmable through 1/10V protocol or Non Dimmable. Not suitable for wall installations.

Fuente de alimentación intermedia para instalación en superficie. Dimable mediante protocolo 1/10V o No Dimable. No se puede instalar en carriles en pared.



57W – 220/240V
06.2511.40
06.2511.06
06.2511.14
06.2511.CZ
06.2511.18

Remote Installation

Remote power supply. Dimmable through 1/10V protocol or Non Dimmable.

Fuente de alimentación remota. Dimable mediante protocolo 1/10V o No Dimable.



25W 110/240V – L:110
60.9359
45W 110/240V – L:120
60.9360
57W 220/240V – L:130
60.9361

Remote Installation

Remote power supply. Dimmable through 1/10V protocol.

Fuente de alimentación remota. Dimable mediante protocolo 1/10V.



120W 110*/240V
60.9416

*UL max 100W

DALI

Remote Installation

Remote power supply. Dimmable through DALI protocol.

Fuente de alimentación remota. Dimable mediante protocolo DALI.



120W 110*/240V
60.9426

*UL max 100W

CASAMBI

Remote Installation

CASAMBI controller. It is recommended to adjust the minimum level of regulation to 5%.

Controlador CASAMBI. Se recomienda ajustar el nivel mínimo de regulación al 5%.



60.9392

NEW

Track Lenght (m)	% Driver Nominal Power
1	95
2	95
3	95
4	95
5	95
6	93
7	91
8	89
9	87
10	85

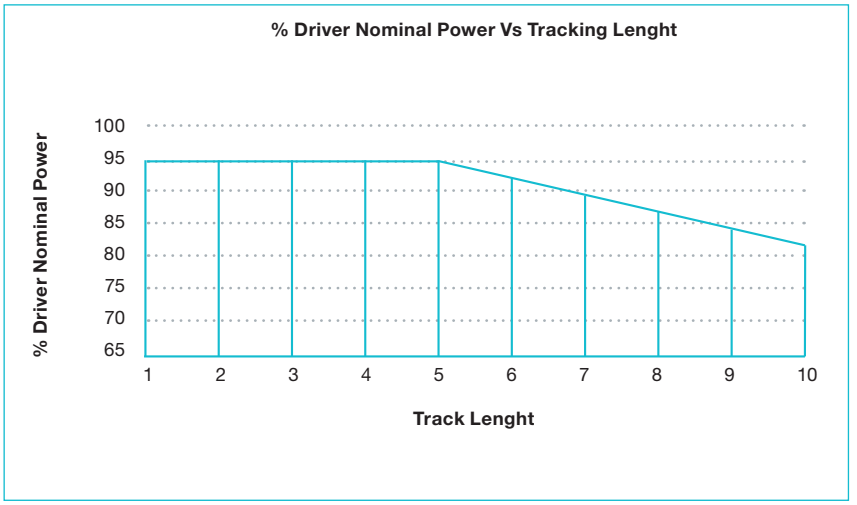

Maximum cable lenght: (driver to track): 5 m
Cable section: 2x1,5 mm^2
Maximum track lenght: 10 m
Maximum power: 120W

Example:

Ref. 60.9361: 57W / 4 m track
57W * 0,95 = 54,15W available

	W luminary	N° luminaries	W luminaries
Find Me 0	3,5	3	10,5
Find Me 1	5,5	0	0
Atom 90	5,5	3	16,5
Atom 120	8	2	16
Atom 200	10,5	1	10,5
			Total system power: 53,5W

Remote 1-10V/Non Dimmable Installations - *Broadcast

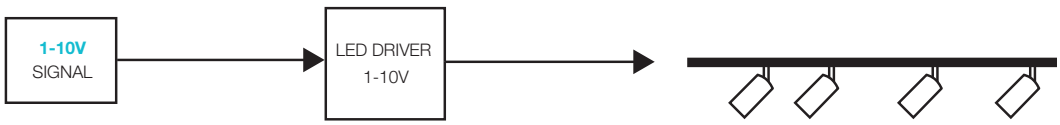

Surface 1-10V/Non Dimmable Installations - *Broadcast

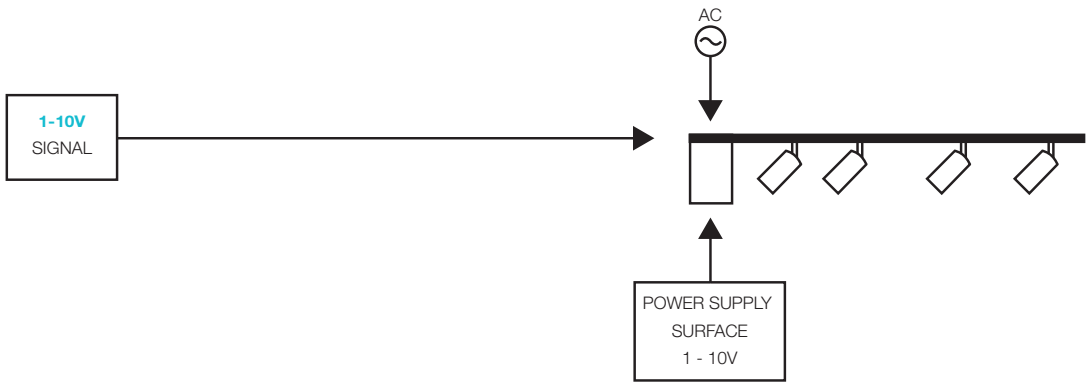

***Broadcast:** Dimming all luminaries at the same time/ regulación de todas las luminarias al mismo tiempo.

Remote DALI Installation - *Broadcast

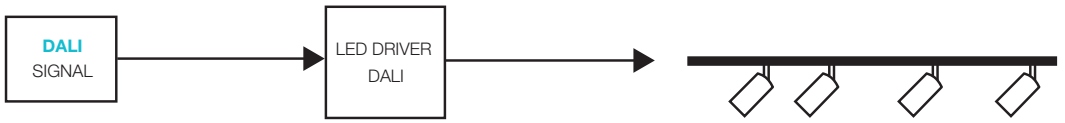

Remote CASAMBI Installation - *Broadcast

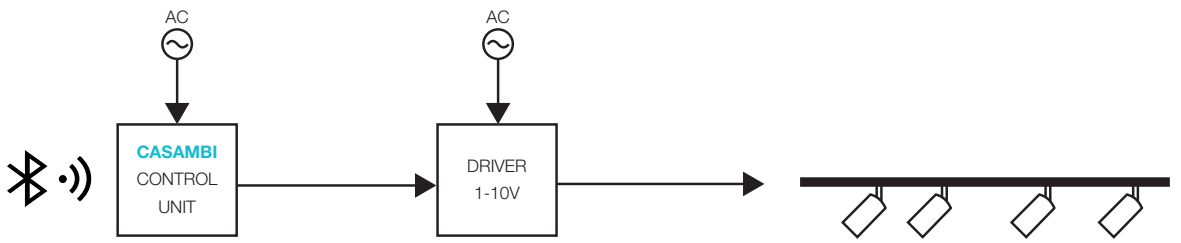

***Broadcast:** Dimming all luminaries at the same time/ regulación de todas las luminarias al mismo tiempo.

NEW

ZERO TRACK – EASY PACKS – FIND ME 1

Power supply surface end + 2m track + 2 spots (Find Me 1)

09.3880.40
09.3880.14

Power supply surface end + 2m track + 3 spots (Find Me 1)

09.3881.40
09.3881.14

Power supply surface middle + 2x1m track + 2 spots (Find Me 1)

09.3882.40
09.3882.14

Power supply surface middle + 2x1m track + 4 spots (Find Me 1)

09.3883.40
09.3883.14

Power supply surface end + 3m track + 3 spots (Find Me 1)

09.3884.40
09.3884.14

Power supply surface end + 3m track + 4 spots (Find Me 1)

09.3885.40
09.3885.14

Power supply surface end + 2x2m track + Intermediate connector + 4 spots (Find Me 1)



09.3886.40
09.3886.14

Power supply surface middle + 2x2m track + 4 spots (Find Me 1)

09.3887.40
09.3887.14

NEW

ZERO TRACK – EASY PACKS – FIND ME 1

COLOURS	MODEL	UNITS
Black/White	FINDME 1 ZERO TRACK POWER LED 2700K CRI90 SPOT 5.5W	2
Black/White	TRACK 2 MT SURF ZERO TRACK	1
Black/White	BLIND END ZERO TRACK	1
Black/White	POWER SUPPLY SURFACE END 57W 1-10V ZERO TRACK	1

Power supply surface end + 2m track + 2 spots (Find Me 1)

09.3880.40
09.3880.14

COLOURS	MODEL	UNITS
Black/White	FINDME 1 ZERO TRACK POWER LED 2700K CRI90 SPOT 5.5W	3
Black/White	TRACK 2m SURFACE ZERO TRACK	1
Black/White	BLIND END ZERO TRACK	1
Black/White	POWER SUPPLY SURFACE END 57W 1-10V ZERO TRACK	1

Power supply surface end + 2m track + 3 spots (Find Me 1)

09.3881.40
09.3881.14

COLOURS	MODEL	UNITS
Black/White	FINDME 1 ZERO TRACK POWER LED 2700K CRI90 SPOT 5.5W	2
Black/White	TRACK 1m SURFACE ZERO TRACK	2
Black/White	BLIND END ZERO TRACK	2
Black/White	POWER SUPPLY SURFACE MIDDLE 57W 1-10V ZERO TRACK	1

Power supply surface middle + 2x1m track + 2 spots (Find Me 1)

09.3882.40
09.3882.14

COLOURS	MODEL	UNITS
Black/White	FINDME 1 ZERO TRACK POWER LED 2700K CRI90 SPOT 5.5W	4
Black/White	TRACK 1m SURFACE ZERO TRACK	2
Black/White	BLIND END ZERO TRACK	2
Black/White	POWER SUPPLY SURFACE MIDDLE 57W 1-10V ZERO TRACK	1

Power supply surface middle + 2x1m track + 4 spots (Find Me 1)

09.3883.40
09.3883.14

COLOURS	MODEL	UNITS
Black/White	FINDME 1 ZERO TRACK POWER LED 2700K CRI90 SPOT 5.5W	3
Black/White	TRACK 3m SURFACE ZERO TRACK	1
Black/White	BLIND END ZERO TRACK	1
Black/White	POWER SUPPLY SURFACE END 57W 1-10V ZERO TRACK	1

Power supply surface end + 3m track + 3 spots (Find Me 1)

09.3884.40
09.3884.14

COLOURS	MODEL	UNITS
Black/White	FINDME 1 ZERO TRACK POWER LED 2700K CRI90 SPOT 5.5W	4
Black/White	TRACK 3m SURFACE ZERO TRACK	1
Black/White	BLIND END ZERO TRACK	1
Black/White	POWER SUPPLY SURFACE END 57W 1-10V ZERO TRACK	1

Power supply surface end + 3m track + 4 spots (Find Me 1)

09.3885.40
09.3885.14

COLOURS	MODEL	UNITS
Black/White	FINDME 1 ZERO TRACK POWER LED 2700K CRI90 SPOT 5.5W	4
Black/White	TRACK 2m SURFACE ZERO TRACK	2
Black/White	STRAIGHT CONNECTOR ZERO TRACK	1
Black/White	BLIND END ZERO TRACK	2
Black/White	POWER SUPPLY SURFACE END 57W 1-10V ZERO TRACK	1

Power supply surface end + 2x2m track + Intermediate connector + 4 spots (Find Me 1)

09.3886.40
09.3886.14

COLOURS	MODEL	UNITS
Black/White	FINDME 1 ZERO TRACK POWER LED 2700K CRI90 SPOT 5.5W	4
Black/White	TRACK 2m SURFACE ZERO TRACK	2
Black/White	BLIND END ZERO TRACK	2
Black/White	POWER SUPPLY SURFACE MIDDLE 57W 1-10V ZERO TRACK	1

Power supply surface middle + 2x2m track + 4 spots (Find Me 1)

09.3887.40
09.3887.14

NEW

ZERO TRACK – EASY PACKS – ATOM 120

Power supply surface end + 2m track + 2 spots (Atom 120)

09.3890.40
09.3890.14

Power supply surface end + 2m track + 3 spots (Atom 120)

09.3891.40
09.3891.14

Power supply surface middle + 2x1m track + 2 spots (Atom 120)

09.3892.40
09.3892.14

Power supply surface middle + 2x1m track + 4 spots (Atom 120)

09.3893.40
09.3893.14

Power supply surface end + 3m track + 3 spots (Atom 120)

09.3894.40
09.3894.14

Power supply surface end + 3m track + 4 spots (Atom 120)



09.3895.40
09.3895.14

Power supply surface end + 2x2m track + Intermediate connector + 4 spots (Atom 120)

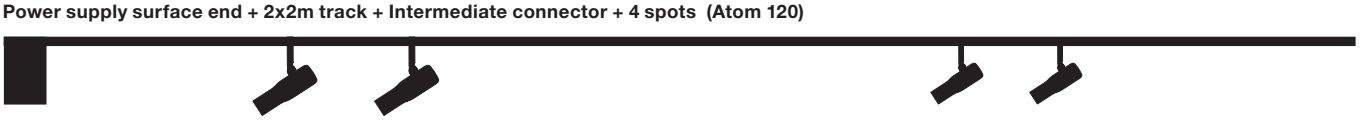

09.3896.40
09.3896.14

Power supply surface middle + 2x2m track + 4 spots (Atom 120)

09.3897.40
09.3897.14

NEW

ZERO TRACK – EASY PACKS – ATOM 120

COLOURS	MODEL	UNITS
Black/White	ATOM 120 ZERO TRACK POWER LED CCT=2700K CRI>90 SPOT 8W	2
Black/White	TRACK 2m SURFACE ZERO TRACK	1
Black/White	BLIND END ZERO TRACK	1
Black/White	POWER SUPPLY SURFACE END 57W 1-10V ZERO TRACK	1

Power supply surface end + 2m track + 2 spots (Atom 120)

09.3890.40
09.3890.14

COLOURS	MODEL	UNITS
Black/White	ATOM 120 ZERO TRACK POWER LED CCT=2700K CRI>90 SPOT 8W	3
Black/White	TRACK 2m SURFACE ZERO TRACK	1
Black/White	BLIND END ZERO TRACK	1
Black/White	POWER SUPPLY SURFACE END 57W 1-10V ZERO TRACK	1

Power supply surface end + 2m track + 3 spots (Atom 120)

09.3891.40
09.3891.14

COLOURS	MODEL	UNITS
Black/White	ATOM 120 ZERO TRACK POWER LED CCT=2700K CRI>90 SPOT 8W	2
Black/White	TRACK 1m SURFACE ZERO TRACK	2
Black/White	BLIND END ZERO TRACK	2
Black/White	POWER SUPPLY SURFACE MIDDLE 57W 1-10V ZERO TRACK	1

Power supply surface middle + 2x1m track + 2 spots (Atom 120)

09.3892.40
09.3892.14

COLOURS	MODEL	UNITS
Black/White	ATOM 120 ZERO TRACK POWER LED CCT=2700K CRI>90 SPOT 8W	4
Black/White	TRACK 1m SURFACE ZERO TRACK	2
Black/White	BLIND END ZERO TRACK	2
Black/White	POWER SUPPLY SURFACE MIDDLE 57W 1-10V ZERO TRACK	1

Power supply surface middle + 2x1m track + 4 spots (Atom 120)

09.3893.40
09.3893.14

COLOURS	MODEL	UNITS
Black/White	ATOM 120 ZERO TRACK POWER LED CCT=2700K CRI>90 SPOT 8W	3
Black/White	TRACK 3m SURFACE ZERO TRACK	1
Black/White	BLIND END ZERO TRACK	1
Black/White	POWER SUPPLY SURFACE END 57W 1-10V ZERO TRACK	1

Power supply surface end + 3m track + 3 spots (Atom 120)

09.3894.40
09.3894.14

COLOURS	MODEL	UNITS
Black/White	ATOM 120 ZERO TRACK POWER LED CCT=2700K CRI>90 SPOT 8W	4
Black/White	TRACK 3m SURFACE ZERO TRACK	1
Black/White	BLIND END ZERO TRACK	1
Black/White	POWER SUPPLY SURFACE END 57W 1-10V ZERO TRACK	1

Power supply surface end + 3m track + 4 spots (Atom 120)

09.3895.40
09.3895.14

COLOURS	MODEL	UNITS
Black/White	ATOM 120 ZERO TRACK POWER LED CCT=2700K CRI>90 SPOT 8W	4
Black/White	TRACK 2m SURFACE ZERO TRACK	2
Black/White	STRAIGHT CONNECTOR ZERO TRACK	1
Black/White	BLIND END ZERO TRACK	2
Black/White	POWER SUPPLY SURFACE END 57W 1-10V ZERO TRACK	1

Power supply surface end + 2x2m track + Intermediate connector + 4 spots (Atom 120)

09.3896.40
09.3896.14

COLOURS	MODEL	UNITS
Black/White	ATOM 120 ZERO TRACK POWER LED CCT=2700K CRI>90 SPOT 8W	4
Black/White	TRACK 2m SURFACE ZERO TRACK	2
Black/White	BLIND END ZERO TRACK	2
Black/White	POWER SUPPLY SURFACE MIDDLE 57W 1-10V ZERO TRACK	1

Power supply surface middle + 2x2m track + 4 spots (Atom 120)

09.3897.40
09.3897.14