



Communication

BT Drive Free 411

1 021 104 411



www.blaupunkt.com

 **BLAUPUNKT**

Contents

BT Drive Free 411	3
Bluetooth technology.....	3
Safety and general information	4
Disposal notes	5
Scope of delivery	5
Installation on the steering wheel	5
Overview	6
Battery information	6
Charging the battery.....	7
Switching on/off.....	8
Registering (pairing) and connecting with the cell phone.....	8
Multi-connection function.....	9
Establishing a connection with two cell phones	9
Using the BT Drive Free 411.....	10
Resetting the BT Drive Free 411	12
Light indicators and signal tones	12
Fault removal	13
Declaration of conformity	13
Warranty	13
Technical data.....	14

BT Drive Free 411

This wireless Bluetooth hands-free system was developed specifically for users who want to use their cell phone while driving. The BT Drive Free 411 is conveniently attached to the steering wheel. The multi-connection function allows the simultaneous use of the BT Drive Free 411 with two cell phones. Its improved microphone system and DSP technology for echo cancelling and noise suppression achieve an excellent hand-free quality.

Bluetooth technology

Bluetooth™ is a registered trademark of Bluetooth SIG, Inc. Bluetooth is a wireless communication technology with short range. It enables wireless connections between all compatible portable and stationary communication devices. The technology is based on a radio connection that ensures a fast and reliable transmission of voice and data information.

Bluetooth is oriented to the worldwide applicable standard for operating in the internationally recognised ISM frequency band (Industrial Scientific & Medical). Within the ISM band (2.4 GHz to 2.48 GHz), the Bluetooth transmission operates 1600 times per second between 79 different frequencies with a data transmission range of up to 10 metres (Class 2).

Safety and general information

- Carefully read the operating instructions and follow the instructions.
- Observe all locally applicable laws for the use of cell phones and hands-free systems while driving. Operate the BT Drive Free 411 only if the traffic situation allows it and you are not creating a risk for other traffic participants.
- To avoid any damages and malfunctions, do not drop the device from an elevated height.
- Protect the device against humidity, water and other liquids. If the device should have been exposed to water, humidity or other liquids, do not use it since it may lead to damages of the device and to injuries from electrical shock or explosion.
- Do not expose the device to extreme heat sources, such as direct sunlight. This can cause explosions as well as reduce the performance and/or service life of the battery.
- Do not make any changes or repairs to the device and do not attempt to disassemble it. (Particularly not on the battery since the risk of explosion exists.) It will immediately void the warranty.
- Do not place any heavy objects on the device.
- Use only the supplied charger.
- Repairs and service work may be performed only by a qualified service centre or the manufacturer.
- In case of extended non-use or thunderstorms, disconnect the device from the power supply.

Disposal notes



Use the return and collection systems available to dispose of the old device.

Scope of delivery


The scope of delivery includes:

- BT Drive Free 411
- 12-volt DC vehicle charger adapter
- USB charger cable
- Operating instructions


Installation on the steering wheel

Fasten the BT Drive Free 411 to the steering wheel using the Velcro strap. Firmly pull the Velcro strap together so that the device will not loosen while driving. Attach the BT Drive Free 411 to the inside circle of the steering wheel and select a position so that it does not interfere with steering the vehicle.

Warning: The BT Drive Free 411 may not be positioned within the deployment area of an air bag.

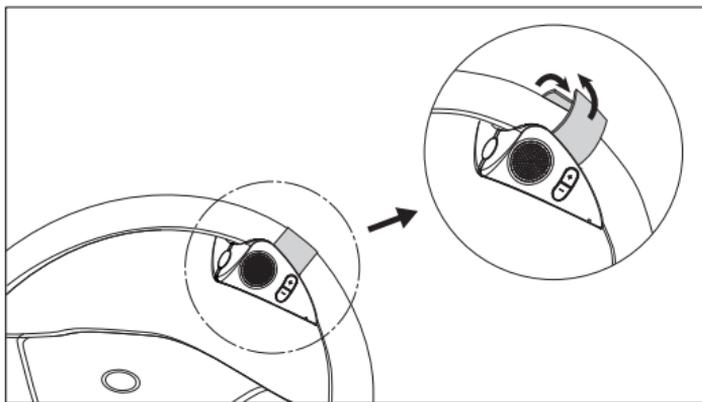

Overview

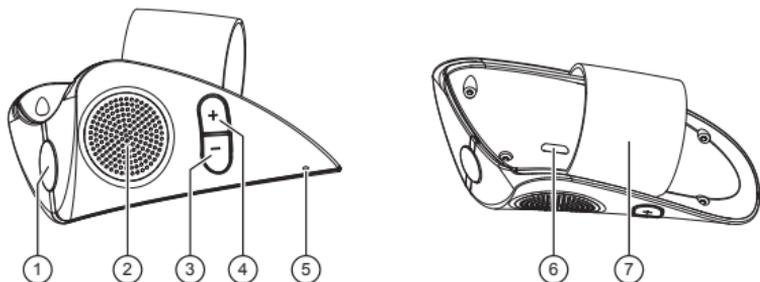

- ① MF button (illuminated multifunction button)
- ② Loudspeaker
- ③ Decrease volume (-)
- ④ Increase volume (+)
- ⑤ Microphone
- ⑥ Charging socket (micro USB port)
- ⑦ Velcro strap for fastening to the steering wheel

Battery information

The device is equipped with an integrated lithium-polymer battery. The battery cannot be replaced. Do not attempt to remove the battery from the device since it would damage the device. The full performance of a new battery is not achieved until after two or three complete charging-discharging cycles. The battery can be charged and discharged several hundred times, but it loses its capacity over time.

Disconnect the BT Drive Free 411 from the power supply as soon as the battery is fully charged, since overcharging would reduce the service life of the battery. A charged battery loses its capacity if it is not used.


Important: Ensure that the battery is fully charged if you do not use the device for a longer period of time. To avoid a complete discharge of the battery, the BT Drive Free 411 should be charged at least every 2 months.

Charging the battery

The BT Drive Free 411 is operated with a rechargeable battery. Charge the battery completely before its first use. Read the section "Battery information" before starting the charging process.

You have to remove the BT Drive Free 411 from the steering wheel for the charging procedure. The charging socket is located at the side of the housing that rests against the steering wheel. Connect the BT Drive Free 411 with the vehicle charging adapter via the USB cable. Insert the vehicle charging adapter into the cigarette lighter of the vehicle. The BT Drive Free 411 can also be charged with the USB cable connected to the computer.

Note: As soon as the charger is connected, the BT Drive Free 411 switches off.



During the charging process, the MF button lights red. After the battery is fully charged, the MF button lights blue. The charging process of the battery lasts approx. 3 hours. Disconnect the BT Drive Free 411 from the charger after it has been charged.

A completely charged battery supports a talk time of up to 7 hours and a standby time of up to 300 hours. If the charge state of the battery becomes low, the MF button flashes red every 3 seconds and you hear a warning beep every 20 seconds.

Switching on/off

Switching on

To switch the unit on, press the MF button for approx. 3 seconds until you hear a high-pitched signal tone and the MF button lights blue. Afterwards, the MF button lights blue and the device is switched on.

Switching off

To switch the unit off, press the MF button for approx. 3 seconds until you hear a low-pitched signal tone and the MF button lights red. Afterwards, the device is switched off.

Registering (pairing) and connecting with the cell phone

Before you can use the BT Drive Free 411, you must register and connect it with a Bluetooth-ready cell phone. Registering is a one-time process and required only for the first connection with the cell phone. The BT Drive Free 411 can be registered with up to eight cell phones and be connected simultaneously with two cell phones.

- Hold the BT Drive Free 411 within range of a Bluetooth-ready cell phone; the distance should not exceed a metre.
- The BT Drive Free 411 must be switched off.
- Press the MF button for approx. 6 seconds until you hear a low-pitched signal tone and the MF button intermittently flashes red and blue. The device is in registration mode.
- Activate the Bluetooth function of the cell phone and start the search for Bluetooth devices. (For further details, please read the operating instructions of your cell phone).
- From the list of devices found, select the "BT DF 411".
- If required, enter the PIN code "0000" and confirm the entry. If the pairing process was successful, you hear a signal tone and the MF button lights blue for 3 seconds. (Note: The PIN code is preprogrammed and cannot be changed.)
- After registering, the BT Drive Free 411 automatically connects with the cell phone. For some cell phones, you have to manually confirm the connection. Next, the BT Drive Free 411 changes to standby mode and the MF button flashes blue every 3 seconds.

Note: If the registering is not completed within 2 minutes, the BT Drive Free 411 switches off again. In this case, repeat the registering.

Multi-connection function

The multi-connection function allows the simultaneous use of the BT Drive Free 411 with two cell phones. This is advantageous for users with a personal and a business cell phone.

Establishing a connection with two cell phones

There are several options of connecting the BT Drive Free 411 with already registered cell phones.

- **Automatic connection**

When switching on the BT Drive Free 411, a connection is automatically established with the two most recently connected cell phones.

- **Establishing a connection via the BT Drive Free 411**

To manually establish a connection between the BT Drive Free 411 and the two most recently connected cell phones, press the MF button. The BT Drive Free 411 first connects itself with the most recently connected cell phone. Then it connects itself with the next most recently connected one.

- **Establishing a connection via the cell phone**

If the cell phone is not one of the two most recently connected cell phones with the BT Drive Free 411, you have to establish the connection via the Bluetooth menu of the cell phone. After successful connection, you can establish another connection with a second cell phone. This allows you to determine the sequence of connections.

If two cell phones are connected with the BT Drive Free 411, the cell phone connected first is the first device and the other one the second device. Another connection can be established only after first disconnecting one of the two cell phones. The cell phone which is still connected afterwards becomes the first device in the sequence.

Note that voice dialing is available only for the first device and the operation for redialling the last number differs for the first and the second device. The other functions are executed the same way using the BT Drive Free 411 as a connection with only one cell phone.

Using the BT Drive Free 411

After successfully completing the registration and charging the battery, the following functions can be executed:

Making a call

– **Voice dialing***

To activate voice dialing, briefly press the MF button. You hear several signal tones. After the signal tone, speak the voice command. After the voice command has been recognized, the cell phone dials the number associated with it.

Note: If two cell phones are connected with the BT Drive Free 411, the voice commands are directed only to the cell phone connected first.

– **Redialling the last number***

Press the MF button twice. You hear a signal tone and the number dialled last is being redialled.

Note: If two cell phones are connected with the BT Drive Free 411, hold the "-" button pressed for 2 seconds to dial the last number of the cell phone connected last.

– **Call origination via cell phone**

Select the desired number as usual via the cell phone. The call is automatically transferred to the BT Drive Free 411.

Answering a call

To answer an incoming call, briefly press the MF button.

Ending a call

Briefly press the MF button to end a call.

Rejecting a call*

To reject a call, hold the MF button pressed until you hear a signal tone.

Adjusting the volume

During a phone call, adjust the volume with the buttons "+" and "-".

Muting the microphone

To mute the microphone during a call, press the "-" button for 3 seconds. The MF button flashes red every 10 seconds and you hear two signal tones. Press the "-" button again for 3 seconds to cancel mute.

Transferring a call

To transfer a call from the BT Drive Free 411 to the cell phone, press the buttons "+" and "-" at the same time. Repeat the step to transfer the call back to the BT Drive Free 411.

Note: With some cell phones, the connection is disconnected if you transfer the call to the cell phone. To transfer the call back to the BT Drive Free 411, you have to press the MF button instead of the buttons "+" and "-".

Managing calls*

You can answer and manage two calls on one of the connected cell phones via the BT Drive Free 411.

You receive a call during an active call	
Hold the active call and answer the incoming call.	Press the MF button for 2 seconds.
End the active call and answer the incoming call.	Briefly press the MF button.
Continue the active call and reject the incoming call.	Press the MF button twice.
You are conducting two calls, an active one and one on hold	
Change between the active call and the one on hold.	Press the MF button for 2 seconds.
End the active call and answer the call on hold.	Briefly press the MF button.
Continue the active call and end the call on hold.	Press the MF button twice.
Continue the active call and answer the call on hold.	Briefly press the "+" button

Note: You do not have the option of managing several calls from two connected cell phones at the same time. When you receive a call on one cell phone while a call is active on the other cell phone, the active call is being ended when you answer the incoming call by briefly pressing the MF button.

* The cell phone must support this function. You find the pertinent information in the operating instructions of the cell phone.

Resetting the BT Drive Free 411

The BT Drive Free 411 can be registered with up to eight cell phones. You can delete the registration list and reset the hands-free system to the factory settings.

- The BT Drive Free 411 must be switched on and no connection may exist to a cell phone.
- Press and hold down the "+" and "-" buttons simultaneously for approx. 10 seconds until the MF button intermittently flashes lights red and blue.
- If the registration list was deleted, the MF button stops flashing intermittently.
- After the next switch-on, the BT Drive Free 411 is in registration mode.

Light indicators and signal tones

Device status	MF button	Signal tones
Switching on	Lights blue for 3 seconds	1 high-pitched sound
Switching off	Lights red for 3 seconds	1 low-pitched sound
Registration mode	Flashes red and blue alternately	
Standby mode without connection	Flashes blue once every 3 seconds	
Standby mode with connection	Lights blue every 3 seconds	
Incoming call	Flashes blue	
Active call	Flashes blue once every 2 seconds	
Mute	Flashes red once every 10 seconds	2 tones every 10 seconds
Low battery	Flashes red once every 3 seconds	5 tones every 20 seconds
Battery is charging	Lights red. Lights blue after the battery is fully charged.	

Fault removal

If a connection between the BT Drive Free 411 and a cell phone cannot be established, observe the following:

- Ensure that the battery is charged.
- Ensure that the Bluetooth function of the cell phone is activated. You find more detailed information in the operating instructions of the cell phone.
- Check whether the BT Drive Free 411 is connected with the cell phone.
- Ensure that the distance between the BT Drive Free 411 and a registered cell phone is less than 10 metres and that no obstacles are between the two devices. Obstacles can interfere with the transmission or reduce the range.
- If none of these measures is successful, please contact the service department of your distributor.
- The BT Drive Free 411 meets the Bluetooth specification v2.1 + EDR. The flawless function between the BT Drive Free 411 and Bluetooth-ready cell phones from different manufacturers and of different types cannot be guaranteed since it depends on the compatibility.

Declaration of conformity

The Blaupunkt AudioVision GmbH & Co. KG declares that this product complies with the basic requirements and the other relevant regulations of the directive 1999/5/EC. The declaration of conformity can be found on the Internet under www.blaupunkt.com.

Warranty

We provide a manufacturer's warranty for products bought within the European Union. For devices purchased outside the European Union, the warranty terms issued by our respective responsible domestic agency are valid. The warranty terms can be called up from www.blaupunkt.com.

Technical data

Bluetooth specification	Version 2.1 + EDR (Enhanced Data Rate) + SSP (Secure Simple Pairing)*
Supported Bluetooth profiles	Headset and hands-free profiles
Frequency range	2.4 to 2.48 GHz ISM band
Bluetooth range	Up to 10 metres (Class 2)
Dimensions	46 (L) x 36 (W) x 95 (H) mm
Weight	approx. 40 g
Battery charging time	approx. 3 hours
Talk time	up to 7 hours
Standby time	up to 300 hours
Battery type	Lithium-polymer, 3.7 V, 160 mAh, rechargeable, non-replaceable
Charger	5 V - 6 V DC, 300 mA

* For registering hands-free systems without entering the PIN code if the other Bluetooth device also supports version 2.1.

Subject to change!

FCC-Statements

All following FCC statements are valid for the Industry Canada Standard (IC) as well.

General

Interference Warning: (according to FCC part 15.19)

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause harmful interference, and
- (2) this device must accept any interference received, including interference that may cause undesired operation

Caution: (pertaining to FCC part 15.21)

Modifications not expressly approved by this company could void the user's authority to operate the equipment.

Blaupunkt AudioVision GmbH & Co. KG
Robert-Bosch-Str. 200
D-31139 Hildesheim
5 101 040 002

